

# Typical Performance Characteristics in 25°C Ambient



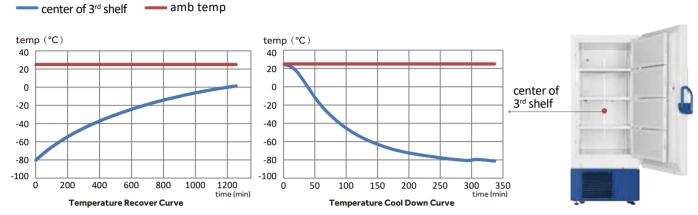

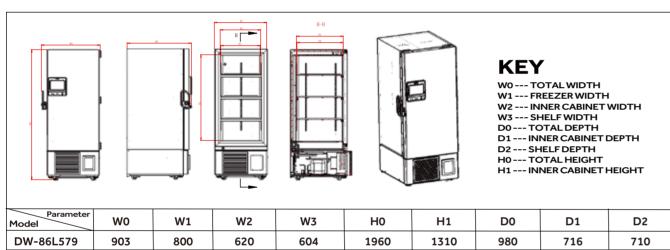

# **Specifications**

			DW-86L	579		
	Cabinet Type		Upright	Functions	High/Low Temperature	Y
Technical Data	Climate Class		N		Hot Condenser	Y
	Cooling Type		Direct cooling		Power Failure	Y
	Defrost Mode		Manual		High/LowVoltage	Y
	Refrigerant		HC		Sensor Error	Y
	Sound Level (dB (A))		47		Low Battery	Y
Performance	Cooling Performance (°C)		-86		,	
	Temperature Range (°C)		-40~-86		High Ambient Temperature	Y
Control	Controller		Microprocessor		Door Ajar	Υ
	Display		LCD		Caster	Y
Electrical Data	Power Supply (V/Hz)		220~240/50		Foot	Y
	Power (W)		1000		Porthole	Y/2
	Electrical Current (A)		5.5		Shelves/Inner Doors	-
Dimensions	Capacity (L/Cu.Ft)		579/20.45			3/4
	Net/Gross Weight (approx)	kg	300/330	Accessories	USB Interface	Y
		lbs	661.4/727.5		Remote Alarm	Y
	Interior Dimension (W*D*H)	mm	620*716*1310		5V Power Supply Port	Υ
		in	24.4*28.2*51.6		Temperature Chart Recorder	Optional
	Exterior Dimension (W*D*H)	_mm	903*980*1960		RS485 Port	Standard
		in	35.6*38.6*77.2			
	Packing Dimension (W*D*H)	mm	950*1055*2130		CO2 Backup System	Optional
	racking birnerision (W.D.H)	in	37.4*41.5*83.9		LN2 Backup System	Optional
	Container Load (20'/40'/40'H)		12/24/24	Other	Certification	CE







- DW-86L579



# **Intelligent Inventory Management**

10-inch touchscreen with single version inventory management allows users to easily record item locations, entry and exit records for intelligent stock management.

# Safe and Reliable Storage

Temperature uniformity  $\leq \pm 4^{\circ}$ C, equipped with an intelligent temperature monitoring system, real-time temperature data monitoring function and multiple safety alarm system.

# **Energy Saving and Environmentally Friendly**

The optimized hydrocarbon refrigeration system is more environmentally friendly and uses significantly less energy than older technologies, saving up to 30% on electricity. ENERGY STAR certified.

# Qingdao Haier Biomedical Co.,Ltd.

Salvum

No.280 Feng Yuan Road, High-tech Zone, Qingdao, 266109, P.R. China Tel: +86-0532-88935593 Website: www.haiermedical.com













# **ULT Freezer DW-86L579**





### Narrow Door Design

The freezer can pass through a 830mm wide door when the freezer door is open.



**New Handle Design** 

Adopting exclusive slide design, easy to open and close the door



**Pressure Equalization Port** 

Equipped with pressure equalization port for easy opening



### Porthole

Two portholes as standard, allows for independent testing of cabinet temperature



### Filter Design

Tool-free removable filter, making it easy and quick to clean the filter



### **Detachable Inner Door Design**

Tool-free detachable inner door, ensuring easy and quick defrost



# **Product Advantages**





# Large Intelligent LCD Screen Visual Management


10-inch high-performance LCD capacitive screen, sensitive touch operation; intuitive display of inside temperature, ambient temperature, input voltage and other data and temperature curves.

# **Equipped with Multiple Interfaces**

·Standard USB interface, capable of storing data for 10 years

·Standard remote alarm terminal and RS485 port





# Password lock Face recognition Fingerprint module

# Multiple Options for Safe Management and Control Systems

Password lock as standard with optional fingerprint module, face recognition and punch card system. Multi-person management control option to ensure safe and secure storage.

### **Optional IoT System Real-time Monitoring**

The IoT APP can monitor the operating status of the equipment anytime and anywhere. The unit is equipped with self-diagnose system faults and alarm functions, ensuring sample safety.



# Safe and Secure with Multiple Alarms

Designed and manufactured with multiple alarm functions, such as high temperature alarm, low temperature alarm, sensor failure alarm, power failure alarm, low battery alarm, door ajar alarm and high ambient temperature alarm to name a few.



# time (m)

### Precise Temperature Control ensures Safe Storage

The setting temperature is adjustable between -40  $\sim$  -86°C, monitoring temperature curves in real time, and the temperature safety alarm system is the latest design and state-of-the-art technology.

# High-efficiency and Energy-saving Compressor

Adopting high-efficiency HC compressor and optimized refrigeration system, for safe and reliable cold storage of your samples.



Haier Biomedical