



DW-25L262

-25°C Biomedical Freezer



Hydrocarbon (HC) Energy-saving

DW-25L262 adopts an efficient hydrocarbon (HC) compressor and optimized refrigeration system, with power consumption as low as 0.73KW-h/24h.



Environmentally Friendly

The HC system is a completely green refrigeration solution. With LBA foamed polyurethane insulation in line with European ROHS directive for environmentally friendly materials.



Low Noise

Optimized hydrocarbon system and structural noise reduction design, DW-25L262 noise 34 dB, super quiet and low noise.



Security Lock

Mechanical lock plus lock catch, the mechanical door lock can be opened with one key, and the door lock can be padlocked. Secure and safe, suitable for multiple users.

Qingdao Haier Biomedical Co.,Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266109, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International




Haier Biomedical
International

Product Features



Microprocessor

- Microprocessor electronic temperature controller, LCD digital temperature display, display precision is 0.1° C, interior temperature set point -10~-25°C.
- Multiple alarms including high and low temperature, sensor error, power failure, door ajar, high ambient and remote alarm.
- Alarm mode: sound and light alarm.
- It can be connected to remote alarm.

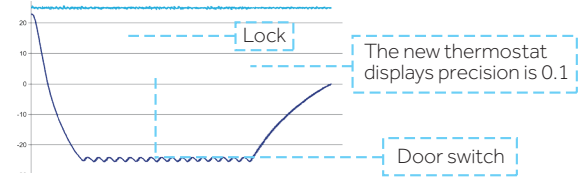

Hydrocarbon System

Increasing cooling rate, reducing energy consumption and lowering noise



Porthole

There is a standard access port (25mm inside diameter) on the left side of the unit, which is convenient for users to test independently.



Multiple Interface Options

- Standard configuration: Remote alarm interface.
- Optional configuration: RS485.



Lock catch

Equipped with remote alarm terminal



CODE MODEL	W0	W1	W2	W3	D0	D1	D2	H0	H1
DW-25L262	700mm	657mm	480mm	450mm	705mm	465mm	313mm	1665mm	1430mm

Key

- W0=TOTAL WIDTH
- W1=FREEZER WIDTH
- W2=INNER CABINET WIDTH
- W3=INNER CABINET SHELF WIDTH
- D0=TOTAL DEPTH
- D1=INNER CABINET DEPTH
- D2=INNER CABINET SHELF DEPTH
- H0=TOTAL HEIGHT
- H1=INNER CABINET HEIGHT

Specifications



Model		DW-25L262	
Technical Data	Cabinet Type	Upright	
	Climate Class	SN N	
	Cooling Type	Direct Cooling	
	Defrost Mode	Manual	
	Refrigerant	HC	
	Sound Level (dB(A))	34	
Performance	Cooling Performance (°C)	-25	
	Temperature Range(°C)	-10~-25	
Control	Controller	Microprocessor	
	Display	LCD	
Electrical Data	Power Supply (V/HZ)	220-240/50	
	Electrical Current (A)	1.4	
Dimensions	Capacity (L/Cu.Ft)	262/9.3	
	Net/Gross Weight (approx)	(kg)	88/93
		(lbs)	194.0/205.0
	Interior Dimension (W*D*H)	(mm)	480*465*1430
		(in)	18.9*18.3*56.3
	Exterior Dimension (W*D*H)	(mm)	700*705*1665
		(in)	27.6*27.8*65.6
	Packing Dimension (W*D*H)	(mm)	775*760*1880
(in)		30.5*29.9*74.0	
Container Load (20'/40'/40'H)		21/45/45	
Alarms	High/Low Temperature	Y	
	Remote Alarm	Y	
	Power Failure	Y	
	Sensor Error	Y	
	Low Battery	N	
	High Ambient Temperature	Y	
	Dirty Condenser	N	
	Door Ajar	Y	
Accessories	Caster	Y	
	Leveling Feet	Y	
	Porthole	Y	
	Drawers/InnerDoors	7/N	
	Adjustable Shelves	N	
	USB Interface	Optional	
	RS485	Optional	
	NFC	N	
Temperature Recorder	N		
Other	Certificate	CE	

*Haier Biomedical reserves the right to change products and specifications without prior notice.