



**HTF-1200W/1500W**



Intelligent Constant  
Speed Design



Multiple Stackable  
Filter Types



Energy-efficient  
EC fan

# Ductless Fume Hood

## Scope of Application

Haier Biomedical Ductless Fume Hood utilizes carbon filtration to protect laboratory personnel and the environment from toxic chemical fumes, odours, and particles. It is widely used in universities, public health, chemical and petrochemical industry, drug testing, museums and many other fields which involve the use of chemicals

## Innovative Design

- Standard VOC sensor detects presence of volatile organic compounds in the exhaust and alarms to indicate filter saturation
- Offers a broad range of accessories and options to meet clients' different requirements

**Qingdao Haier Biomedical Co.,Ltd.**

No.280 Feng Yuan Road, High-tech Zone,  
Qingdao, 266109, P.R. China  
E-mail: [inquiry@haierbiomedical.com](mailto:inquiry@haierbiomedical.com)  
Website: [www.haiermedical.com](http://www.haiermedical.com)



Haier Biomedical  
International



Haier Biomedical  
International



@haiermedicalint



Haier Biomedical  
International



Haier Biomedical  
International

**Key Features**

-  Intelligent constant speed design, ensures the best adsorption effect of the filter
-  Energy-efficient EC fan for a longer service life and reliable operation
-  Offers a broad range of accessories and options to meet clients' different requirements
-  Standard VOC sensor detects presence of volatile organic compounds in the exhaust and alarms to indicate filter saturation
-  Multiple stackable filter types: remove vapor contaminants from the air, can be combined to handle different types of chemicals and particulates during the same application

**Product Details**



**10-inch touch screen**  
Real-time display of VOC concentration, wind speed, filter service life and UV lamp running time. Alerts when filter or UV lamp lifespan falls below 10%

**Air velocity sensor**  
Intelligent constant air velocity ensures the stability


**Universal casters with built-in threaded support legs**

**EC fan**  
Energy-efficient EC fan for a longer service life and reliable and quieter operation

**PIR detection**  
In intelligent mode, the PIR sensor will detect when the operating area has been clear of personnel for more than 15 minutes and automatically switch to LNS green-saving mode

**Electrical sockets**  
Included as standard are two, waterproof sockets with timing technology, which allows the user to program timed on/off function

**Optional Components**



UV lamp



Dual surveillance cameras




Electrically operated glass sash



IoT module




Height adjustable stand



PVC worktable

**Product Dimension**

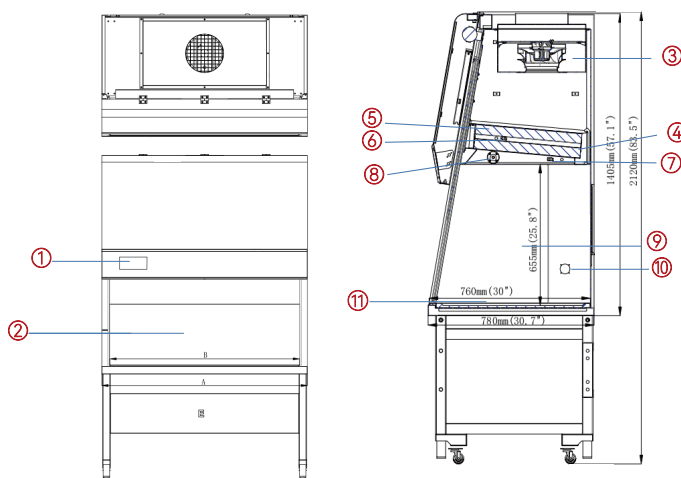

1. Microprocessor Control System
2. Tempered Glass Sliding Sash Window
3. EC fan
4. First filter
5. Second filter (optional)
6. VOC sensor
7. Temperature and humidity sensor
8. Wind velocity sensor
9. Tempered Glass Side
10. Electrical sockets (2 on each side)
11. Powder coated steel worktop

**Types of Filters**

Carbon filters are used to remove toxic gases, hazardous fumes, and odors. These filters are constructed from high-quality carbon pellets and durable chemical-resistant cases. Below is Haier Biomedical filters list

Code No	Name	Suitable Applications
A	Standard Filter (Mixed with N4A1, N4B1 and N4G1 activated carbon)	Suitable for all common laboratory chemicals, especially with organics. When no specific requirements are present, or when more than one type of chemical is used
B	Organic Solvent Filter (N4G1 activated carbon)	Removal of toluene, benzene, xylene, acetone, acetic acid, carbon tetrachloride, chloroform, CxHy, VOC, etc
C	Acid Gas Filter (N4A1 activated carbon)	Removal of hydrochloric acid, sulfuric acid, hydrofluoric acid, hydrogen sulfide, sulfur dioxide, etc
D	Alkaline Gas Filter (N4B1 activated carbon)	Removal of ammonia, amine, etc.
E	Formaldehyde Filter	Mainly used for adsorption of formaldehyde
F	Particle Filter	Mainly used to absorb dust

**Specifications**

Model	HTF-1200W	HTF-1500W
Power Supply (V/Hz)	220/50/60	220/50/60
Power (W)	1200	1300
Sound Level (dB(A))	≤58	≤58
Inflow Air Velocity (m/s)	0.4-0.6	0.4-0.6
Fluorescent Light Intensity (lux)	≥1000	≥1000
Filtration Elements	<b>First Filter</b> Activated Carbon with Granular Media bed (6 different filter types available, codes A-F) <b>Second Filter (optional)</b> Activated Carbon with Granular Media bed (6 different filter types available, codes A-F)	
Exterior Dimensions (W*D*H)(mm)	1336*780*2120	1636*780*2120
Operation Dimensions (W*D*H)(mm)	1230*760*655	1530*760*655
Packaging Dimensions (W*D*H)(mm)	1400*925*1665	1700*925*1665
Net Weight (Kg)	230	250
Packaging Weight (Kg)	290	330
Display	10 inch screen	10 inch screen
VOC Sensor	Standard (1)	Standard (1)
Certification	CE	CE

\*Haier Biomedical reserves the right to change products and specifications without prior notice.