



HRTM-45



Multiple safety
protections



Intelligent and
convenient operation



Efficient and
rapid sterilization

Horizontal Bench-Top Autoclave

Scope of Application

As a type of high pressure sterilizer, it takes steam as its sterilization medium which is fast, safe and economic. They are common used in scientific institutions or R&D institution to make the sterilization for wrapped or unwrapped instrument, fabric, utensils, culture medium, unsealed liquid, etc.

Innovative Design

- High security ensured by extensive safety devices.
- User-friendly interface design, with a standard 7-inch touch screen for convenient interaction.
- Using a new type of steam generator to improve the saturation of saturated steam and make sterilization more thorough.

Qingdao Haier Biomedical Co., Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266111, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International

The products have obtained the following registrations and certifications:

1. EU Electrical Equipment Safety Directive (CE-LVD)
2. EU Pressure Equipment Directive (CE-PED)
3. EU Electromagnetic Compatibility Directive (CE-EMC)
4. EU Medical Device Quality Management System (EN ISO 13485)
5. People's Republic of China medical device registration (NMPA)
6. People's Republic of China special equipment license (TS)
7. People's Republic of China sterilization products health and safety record

Note: In view of the regulatory requirements for pressurized containers and medical devices in various countries and regions and organizations, depending on the bidding or purchasing requirements, this equipment is recognized as having acquired the above standards before being put into local use.

Product Advantages



Triple protection of temperature, pressure monitoring electronic lock, and mechanical safety device; automatically release pressure when overpressure and over-temperature



The innovative vacuum forced cooling system and negative pressure blower drying system rapidly complete sterilization, greatly shortening the sterilization time and improve the drying effect



Optional-Intelligent IoT



Eight Safety Protection

Over-temperature, over-pressure, leakage, over-current, anti-dry burning, door lock safety, sensor disconnection, door status protection



Touchscreen with intuitive user interface for simple operation like your smartphone - even with medical gloves



It occupies little space, is easy to install and can sterilize in a narrow space. The design is novel and won the German Industrial Design Award

Ergonomic Design




7-inch intelligent touch LCD screen

The status of each component on the touch screen is intuitively displayed, easy to understand and convenient to operate


Adopting a new type of steam generator to improve the efficiency of saturated steam

Adopting a highly efficient steam generator with high heat exchange efficiency and large gas production to meet the requirements of the sterilizer for rapid temperature rise and rapid sterilization.

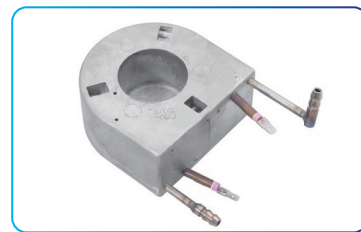


Automatically Detect the Water Quality

When the water quality is unqualified, the sign of the clean water tank automatically turns yellow to timely remind to replace the pure water

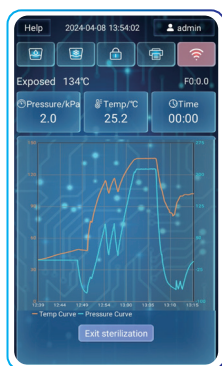

Temperature-Pressure Curve

The temperature-pressure curve is displayed in real-time during the sterilization process, making the entire process clear at a glance

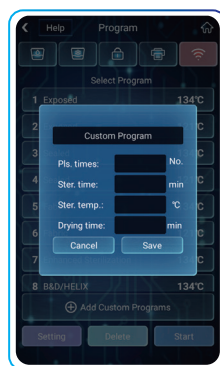


Programmable Mode of the Program

The program can be customarily added




Customizable Parameters of the Program

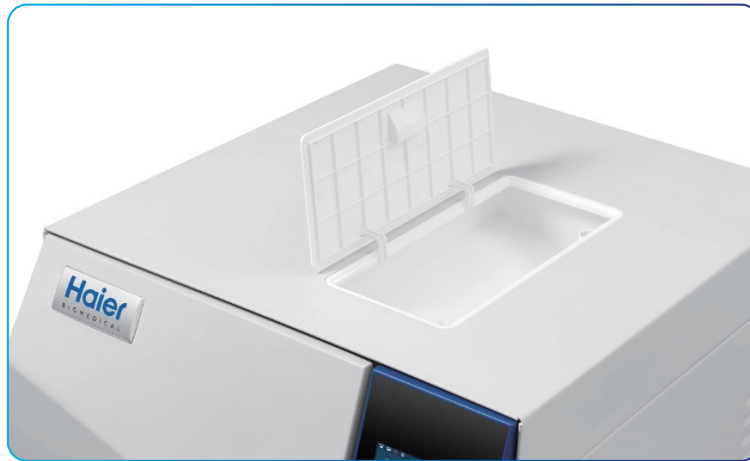

Storage tank

- Open storage tank, easy to clean.
- High water level display, low water level alarm, and when the low water level alarm is triggered, it can meet one sterilization cycle.
- Direct discharge design, the sterilization water does not circulate to ensure the cleanliness of the load.

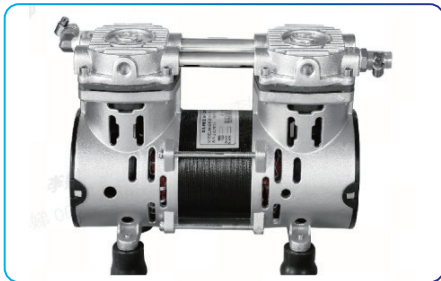

High-efficiency vacuum pump

Greatly shorten the sterilization cycle and improve the sterilization and drying effects.

New sterilization chamber structure

The sterilization chamber is integrally stretched and formed, without dead corners, easy to clean, and ensures a sterile environment.



Specifications



Model			HRTM-45
Technical Data & Dimensions	Display		7-inch Touchscreen
	Chamber Volume (L)	Capacity (L/Cu.Ft)	45/1.6
	Internal Dimensions (w*d*h)	mm	Φ316*615
		in	Φ24.2*47.2
	External Dimensions (w*d*h)	mm	640*840*575
		in	25.2*33.1*22.6
	Packing Dimensions (w*d*h) (With Packaging Bottom Support)	mm	720*965*730
		in	28.3*38*28.7
	Net/Gross Weight (approx)	kg	120/140
		lbs	264.6/308.6
Electrical Data	Container Load (20'/40'/40'H)		54/72/108
	Inner Material		304 stainless steel (option:316 stainless steel)
	The Main Body Material		Coated cold rolled steel
Performance	Power (KW)		4.8KW
	Power Supply(V/Hz)		220-240V-50/60Hz
	Electrical Current (A)		22A
Performance	The sterilization temperature range (°C)		115-134 °C
	Temperature fluctuations (°C)		0-3 °C
	Temperature uniformity (°C)		<2 °C
	Design Temperature (°C)		150 °C
	Design Pressure (Mpa)		0.3
	Rated Working Pressure (Mpa)		0.22Mpa
	Dynamic Pulse Exhaust Times		1-9 (settable)
	Sterilization Time (min)		1-999min
	Noise (dB(A))		≤65
	Temperature Sensor		PT100
	Ambient Range (°C)		5-40 °C
	Humidity Reservoir (L)		8.5
Accessories	Shelves Dimensions (w*d)(mm)		500*215
	Shelves Number Standard/Maximum		3/5
	USB		Y
	Printer		Standard
Others	CE		Y
	PED		Optional

*Haier Biomedical reserves the right to change products and specifications without prior notice.