

Benchtop High-Speed Centrifuge

LX-185T100-J



Scope of Application:

Mainly applied to the experimental processes of collecting, separating, and purifying samples such as cells, macromolecular proteins, body fluids, DNA/RNA, plasmids, and viruses. Widely used in universities, third party testing organizations, disease prevention, medical and health, biological pharmaceutical and other related fields.



Wide range of rotors for application flexibility, compatible with tubes/bottles from 0.2 ml to 100ml



Fast sample processing at maximum speeds of up to 18,500 rpm (30,130 x g)



Optimized sound design for low noise levels ($\leq 63\text{dB(A)}$)

Qingdao Haier Biomedical Technology Co., Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266111, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com
Nov, 2025



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint



Haier Biomedical
International



Haier Biomedical
International



Product Features



Wide range of rotors for application flexibility, compatible with tubes/bottles from 0.2 ml to 100ml



Optimized sound design for low noise levels ($\leq 63\text{dB(A)}$)



Fast sample processing at maximum speeds of up to 18,500 rpm (30,130 xg)



Automatic rotor identification locks the maximum rotational speed to prevent overspeed operation



Use of brushless induction motors to provide maintenance-free operation, eliminating carbon particle emissions



Real time loading imbalance detection, immediate shutdown protection in case of imbalance



Intuitive Interface



LCD keypad and control knob for easy operation, the wide viewing angle more comfortable and practical for users of all heights.



9 acceleration + 10 deceleration stages



Quick recall of up to 99 programs for quick run start by routine users



The speed, centrifugal force, and time can be changed during the centrifugation process

Screen lock function to prevent press errors

Target speed/centrifugal force/time and real-time operation data display.



One key to recall stored programs for more convenient operation


Acceleration/Deceleration rates



Product Parts




Patented anti-seismic door lock. In case of abnormal vibration, the cover can be locked reliably




Unique air duct structure design, the heat inside the centrifugal chamber can dissipate quickly



Dual gas springs for easy door opening and with safety protection



Triple-layer construction to ensure safe use



316 stainless steel centrifuge chamber is rust-free and easy to clean



Emergency lid release, pry out the white plastic plug on the side plate with a tool and pull the attached release cord to open the lid




Specifications

Model	Maximum Capacity	Speed Range (rpm)	Max RCF (xg)	Speed Accuracy (rpm)	Time Setting Range	Display	Noise dB (A)	Power Supply (V/Hz)
LX-185T100-J	6*100ml	500-18,500	30,130	±10	1s-99h/59min (1s/1min increment)	LCD	≤63	220-240/50/60

Power (W)	Exterior Dimensions (W*D*H) (mm)	Lid Opening Height (mm)	Net Weight (kg)	Packing Dimensions (W*D*H)(mm)	Gross Weight (kg)	Certification
500	440*600*346	795	47	495*670*380	51	CE




Fixed-Angle Rotor

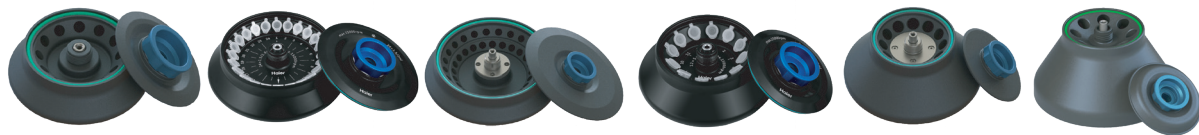


BE No.	BE12CK000	BE12CL000	BE12CH000	BE12DF001	BE12DH001	BE12DJ001
Type	Sealed	Sealed	Sealed	Sealed	Sealed	Sealed
Max Capacity	12*1.5/2ml	24*1.5/2ml	48*1.5/2ml	12*5ml	12*10ml	8*15ml
Max RCF (xg)	25,636	30,130	19,083	20,124	15,547	14,972
Max Speed (rpm)	18,500	17,500	13,000	15,000	12,500	12,000
Tubes per Rotor	12	24	48	12	12	8
Tube						
Max Tube Capacity (ml)	1.5/2	1.5/2	1.5/2	5	10	15
Max Tube Dimensions (Ø x L mm)	11*38	11*38	11*38	13.5*75	16*86	17*121
Tube Type	Round /Conical bottom	Round /Conical bottom	Round /Conical bottom	Round bottom	Round bottom	Conical bottom



Fixed-Angle Rotor

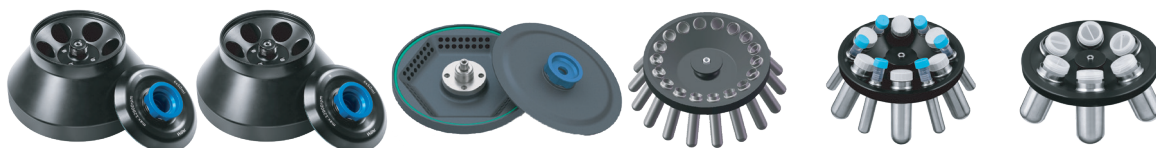

BE No.	BE12DG001	BE12DK001	BE12E6000	BE12DE001	BE12DD001	BE12DC001
Type	Sealed	Sealed	Sealed	Steel sleeve	Steel sleeve	Steel sleeve
Max Capacity	6*50ml	6*50ml	12*8*0.2ml	18*15ml	6*50/15ml	6*100ml
Max RCF (xg)	15,616	16,421	14,891	3,577	3,577	3,348
Max Speed (rpm)	12,000	12,000	12,000	5,000	5,000	4,800
Tubes per Rotor	6	6	12	18	6 pcs(50ml) 6 pcs(15ml)	6
Tube						
Max Tube Capacity (ml)	50	50	0.2	15	50(15)	100
Max Tube Dimensions (Ø x L mm)	29*105	29*118	6*18	17*121	29*118 17*121	41*120
Tube Type	Round bottom	Conical bottom	PCR	Round /Conical bottom	Round /Conical bottom	Round bottom

Adapter(Sets of 6) for BE12DK001

BE No.	BE12JC002
Max Capacity (ml)	15
Tube	
Max Tube Dimensions (Ø x L mm)	17*121
Tube Type	Conical bottom





Swing-Out Rotor



Swing-Out
Rotor Block



BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



Bucket
(Sets of 4)



BE No. BE12FV001


Max Capacity 8*5/7ml

Tubes per
bucket/rotor 8/32

Tube 

Max Tube Dimensions
(Ø x L mm) 13*75/106

Tube Type Short/long blood
collection tube



Swing-Out
Rotor Block



BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



Bucket
(Sets of 4)



BE No. BE12H1000

Max Capacity 5*10ml

Tubes per
bucket/rotor 5/20

Tube 

Max Tube Dimensions
(Ø x L mm) 16*106

Tube Type Large blood
collection tube (Ø 16mm)

Adapter (Sets of 50) for BE12H1000

BE No. BE12JN001

Max Capacity (ml) 5

Tube 

Max Tube Dimensions
(Ø x L mm) 13*75

Tube Type Small blood
collection tube



Swing-Out
Rotor Block



BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



Bucket
(Sets of 4)



BE No. BE12H2000

Max Capacity 2*15ml

Tubes per
bucket/rotor 2/8

Tube 

Max Tube Dimensions
(Ø x L mm) 17*121

Tube Type Conical bottom



Swing-Out Rotor



**Swing-Out
Rotor Block**




BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



**Bucket
(Sets of 4)**



BE No. BE12H3000

Max Capacity (ml) 50

**Tubes per
bucket/rotor** 1/4

Tube 

**Max Tube Dimensions
(Ø x L mm)** 29*118

Tube Type Conical bottom



**Swing-Out
Rotor Block**



BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



**Bucket
(Sets of 4)**



BE No. BE12G7000 BE12J1004

Max Capacity (ml) 100 NA

Bucket Type Flat bottom NA

**Adapter(Sets of 4) for
BE12G7000**



BE No.	BE12JU003	BE12JV003	BE12JW003*	BE12JX003	BE12JY003	BE12JZ003	BE12J0004
Max Capacity	100ml	50ml	2*15ml	15ml	4*10ml	4*5/7ml	4*1.5/2ml
Tubes per adapter/rotor	1/4	1/4	2/8	1/4	4/16	4/16	4/16
Tube							
Max Tube Dimensions (Ø x L mm)	41*120	29*118	17*121	17*121	16*106	13*75/106	11*38
Tube Type	Round bottom	Conical bottom	Conical bottom	Conical bottom	Large blood collection tube (Ø16mm)	Short/long blood collection tube	Round/Conical bottom

*During the use of this adapter, the biocontainment lid is in an unavailable state.



Swing-Out Rotor



**Swing-Out
Rotor Block**



BE No. BE12FR001

Max. RCF (xg) 3,347

Max. speed (rpm) 4,600



**BD CPT tube bucket
(sets of 4)**



BE No. BE12G6000

Max Capacity (ml) 8

**Tubes per
bucket/rotor** 1/4

Tube 

**Max Tube Dimensions
(Ø x L mm)** 16*130

Tube Type Round bottom

BE No. BE12CJ000

Max. RCF (xg) 2,245

Max. speed (rpm) 4,500

Max Capacity 2 plates

Bucket Type Rectangular bottom








Plate Swing-Out Rotor

**Plates for
BE12CJ000**



Plates per rotor

4

4

4

2

W*D*H (mm)

128*86*15

128*86*17.5

128*86*20

128*86*44.5

Plate Type

MTP
(without lid)

MTP
(with lid)

PCR plate
96-fold

DWP