

Plasma Apheresis System



XJ-III Plasma Apheresis System modern advanced computer automation blood processing and separation technology, peristaltic pump blood transport technology and blood processing safety monitoring technology to separate and collect plasma components in human blood, including fresh blood and clinical fresh frozen plasma.

The separator consists of the main unit (centrifuge, blood pump, anticoagulant pump, plasma scale, display screen, air detector, pressure monitor, control panel) and pressurized cuff, and data interconnection system. The relevant data of plasma collection process can be uploaded to blood source management system in real time.

Qingdao Haier Biomedical Co., Ltd.

No.280 Feng Yuan Road, High-tech Zone,
Qingdao, 266111, P.R. China
E-mail: inquiry@haierbiomedical.com
Website: www.haiermedical.com
Dec, 2025



Haier Biomedical
International



Haier Biomedical
International



@haiermedicalint






Haier Biomedical
International



Haier Biomedical
International

Introduction to Components

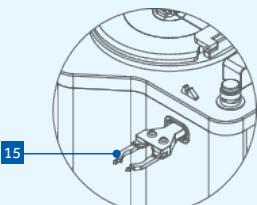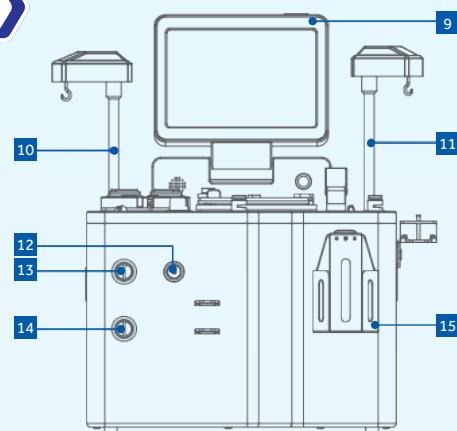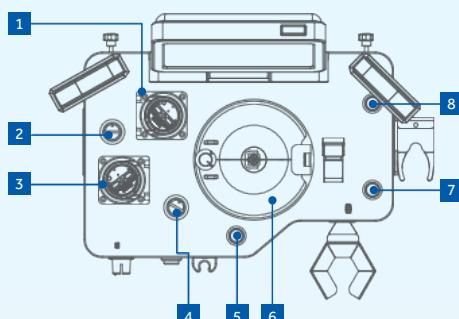

1. Anticoagulant pump 2. Anticoagulant tubing air detector 3. Blood pump 4. Blood tubing air detector 5. Bloodvale 6. Centrifuge
7. Plasma valve 8. Saline valve 9. Display Screen 10. Anticoagulant bracket 11. Saline water bracket 12. Blood line pressure monitor
13. No.1 Air detector for the pipe 14. No.2 Air detector for the pipe 15. Plasma bottle stand (optional)



Easy to Operate:

Guide-way system guides the whole process of operation, also monitors whether all consumables are correctly installed. Automatically complete the writing and uploading of consumables and collection information.



Security Assurance:

Four air detectors are configured to prevent air embolism, pressure monitoring for real-time patient safety. In case of power failure, data is automatically recorded and the recovery program is automatically entered after power supply to ensure that the collection continues smoothly.



Intelligent Adjustment:

Blood can be collected through peripheral veins. The blood pump can automatically adjust the collection speed according to the changes of blood flow in patients, which has little influence on blood flow velocity.



Quality Assurance:

The RBC overflow monitor reduces red blood cell waste while ensuring the quality of plasma collection. The pump head roller and pump housing gap are automatically adjusted to ensure stable flow and effectively protect blood cells from damage.

Specifications

Input Power (VA)	500
Input Voltage (V/Hz)	110-240~50/60
Rated Speed of Centrifuge (r/min)	6000~7500
Communication Interface	RJ-45, USB
Measurements (g)	0-1000
Work Environment	Ambient Temperature 10~30°C, Relative Humidity Less than 85%
Net Weight (kg)	26±2
Exterior Dimensions (W*D*H)(mm)	480*370*720
Certification	MDR